



Radiant Barrier USA
Innovating Reflective Technology

4 ft / 5 ft



DOUBLE P1



① White Poly/ Woven ② Bubbles ③ Bubbles ④ Low E Metalized Foil

Reflective Insulation Solutions

- ✓ 7-layer bubble insulation structure
- ✓ Solid solid or white poly or white woven
- ✓ Low Emittance foil surface (E=5%)
- ✓ Foil reflects 95% of radiant heat
- ✓ Unique recipe of LDPE plastics blend - long service life
- ✓ Stiffer than most bubbles, making it easier to install
- ✓ Suitable for all building insulation applications
- ✓ Perfect for retrofits in home improvements
- ✓ Excellent insulation for metal buildings/carports
- ✓ Minimizes heat bridges in metal buildings
- ✓ Will not delaminate, improving durability and stability
- ✓ Suitable for hybrid installation with foam or fiberglass
- ✓ Useful for metal buildings when white facing is required
- ✓ Provides an excellent R-value when installed with airspace

Highlights

Product Information

White Poly Woven / Bubbles / Bubbles / Low E Metalized Foil
Two layers of 0.32" durable air bubble core laminated between one layer of reflective metalized foil and one layer of white barrier polyethylene

White Finished




POLYSHIELD R-VALUES*	DOUBLE P1
Attic - Vented***	Call for R-Value
Crawl Space*	R-6.1
Metal Buildings**	R-2.5 to R-7.2 Up
	R-5.1 to R-18.3 Down
Post Frame Buildings**	R 2.8 to R-6.8 Wall
	R-1.8 to R-6.5 Up
	R-4.2 to R-17.1 Down
Radiant Floors**	R 2.8 to R-6.8 Wall
	R-5.1 to R-18.3 Down
Wall - Basement Masonry**	R 2.8 to R-6.8 Wall

* At least a 1" air space is required on foil side to achieve the R-Values quoted.
 ** Depends on factors such as the building's interior, roof slope, direction of heat flow, and the size of attainable air gaps available when installing the products
 *** Attic R value depending on installation. R value can be as high as 18 with 8" dead air space and heat flow down. For more details, please contact us 972-836-4829



What You Should Know About R-values

The chart demonstrates that various R-Values can be achieved in different applications with the product listed here. Besides reflecting 95% of radiant heat, when installed correctly, our reflective insulation also provides additional R-Value. R-Value measures resistance to heat flow, particularly through conduction and convection. The higher the R-Value, the greater the resistance. However, several crucial factors must be considered, including climate, the specific insulation and R-Value required for your climate zone, the balance between heat gain and heat loss, the costs of cooling versus heating, your overall energy expenditure patterns, and which areas of your home need insulation or upgrades. It's important to note that in many cases adding mass insulation, such as foam or wool, offers diminishing returns. While increasing R-Value doesn't necessarily translate to greater energy savings, it does lead to higher insulation expenses. Our reflective insulation products can complement existing insulation or be used independently. In both scenarios, our products block 95% of radiant heat. To achieve the R-Value shown in the table above, please adhere to the recommended air gaps. For optimal results, we recommend consulting with your local distributor or contacting our technical experts at 972-836-4829.



- White Poly / Woven
- Bubbles
- Bubbles
- Low E Metalized Foil

Product Specifications : DOUBLE P1	
Standard Roll Size:	4'x125'/4'x75'
Effective Coverage:	500/300 ft ²
Thickness (inches) +/-5%:	0.32" nominal
Standard roll weight (lbs)+/-5%:	33 Lb / 42 Lb
Emittance (Metalized Foil Side):	E=5% (95% Reflective)
Water Vapor Transmission ASTM E-96:	.02 perms
Mold and Mildew:	No Growth
Flame Spread, Smoke Development, Fire Rating:	Class A / Class 1



Radiant Barrier USA
Innovating Reflective Technology

DOUBLE P1




Available finish :


Silver

White Poly

White Woven

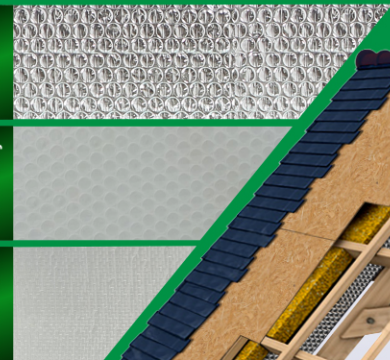

First
Only
Number 1

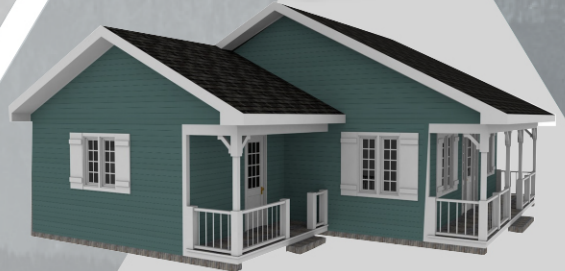

95% REFLECT 95% OF RADIANT HEAT (SILVER SIDE)

BE ACTIVE!
USE REFLECTIVE INSULATION NOW

